

FT5000



FT5000

For years, the ATM industry has trusted Triton for innovative technology that's practical and cost efficient, and Triton has delivered again with the FT5000, a versatile through-the-wall ATM that offers high performance for a surprisingly low investment.

A high volume, reliable through-the-wall ATM you can afford.

Our long-time experience in producing innovative, high quality cash dispensing machines has led us to develop this product focused on the financial institution market. The embedded PC-based FT5000 includes Encrypting PIN Pad (EPP), rear access, and full ADA and Triple DES compliance. Planned enhancements include support for XFS, emulation, and a variety of communication protocols.

But what makes the Triton FT5000 most popular with banks and credit unions is its highly cost-efficient operation. Financial institutions can place a drive-up or a walk-up configuration with two to four cassettes based on transaction volumes. You can count on the reliable operation that has made Triton a leader in the industry. Plus, the Microsoft® CE Windows® operating system makes possible a long list of revenue generating value-added services.

Performance. Reliability. Easy and inexpensive to service. Thanks to Triton, there's finally a through-the-wall unit made just for you.

FT5000 IN DETAIL

A high volume, reliable through-the-wall ATM you can afford.

FEATURES:

- Two to four cassettes
- 10.4" (264 mm) VGA color display with 640 x 480 resolution
- 80 mm thermal printer with presenter
- 32MB FLASH standard, 128MB maximum
- 64MB RAM standard, 256MB maximum
- Microsoft® Windows CE .NET operating system
- Intel® XScale™ 32-bit processor
- One USB slave port
- Four USB master ports
- Two PCMCIA card slots (one occupied by modem)
- Five serial ports, one spare
- 2MB journal storage (32,768 records)
- 56k baud internationally certified modem
- Dip-style card reader or optional EMV smart card reader
- Americans with Disabilities Act (ADA) compliant
- Audio transactions for the visually impaired


- Encrypting PIN Pad (EPP) to comply with all international encryption standards, Triple DES Compliant
- UL 291 Business Hours Service cabinet or optional UL 291 Level 1 safe
- Electronic lock standard, Cencom lock optional
- Multi-lingual capabilities
- Dial-up and TCP/IP communications standard, wireless optional
- Dimensions:
 - Depth 30.0" Vault (762 mm)
 - 12.0" Sleeve (305 mm)
 - Width 16.9" Vault (429 mm)
 - 21.3" Sleeve (541 mm)
 - Height 55.6" Total (1412 mm)
- Weight: 240 lbs. (109 kg)
 - weight varies with options
- Advertising revenue potential:
 - Decal and signage
 - Coupons
 - Transaction screen

OPERATING SPECS:

- Temperature
 - Vault/ Electronics
 - 10°- 40° C / 50°- 104° F
- Relative Humidity 20%-80% Non-condensing
- Power Consumption
 - 2.0A @ 115 VAC at 60 Hz
 - 1.0A @ 230 VAC at 50 Hz



ATM INSTALLATION SPACE REQUIREMENTS FOR ADA COMPLIANCE

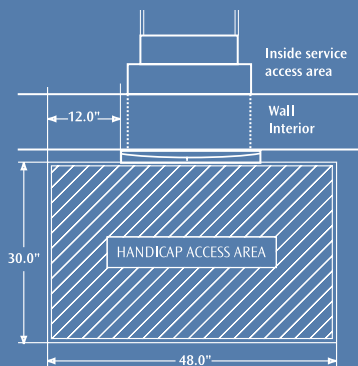

The dimensions shown comply with US Federal ADA guidelines. For installation within the US, be sure to check state and local guidelines for complete compliance. For non - USA installations, check regulations for the country in which the machine will be installed.

*specifications subject to change without notice

For additional information on any of the ATMs in Triton's line-up, please visit our website at www.tritonatm.com.

Triton • 522 East Railroad Street • Long Beach, Mississippi 39560 USA
 Phone: 1-228-868-1317 • Toll free: USA & Canada 1-800-367-7191
www.tritonatm.com • email: sales@trtn.com



Triton is a registered trademark of Triton Systems of Delaware, Inc. Triton is an operating company of Dover Industries, Inc., a subsidiary of Dover Corporation (NYSE:DOV). © Delaware Capital Formation, Inc., 2003. All Rights Reserved. DOVER and DOVER logo are registered trademarks of Delaware Capital Formation, Inc., a wholly-owned subsidiary of Dover Corporation.